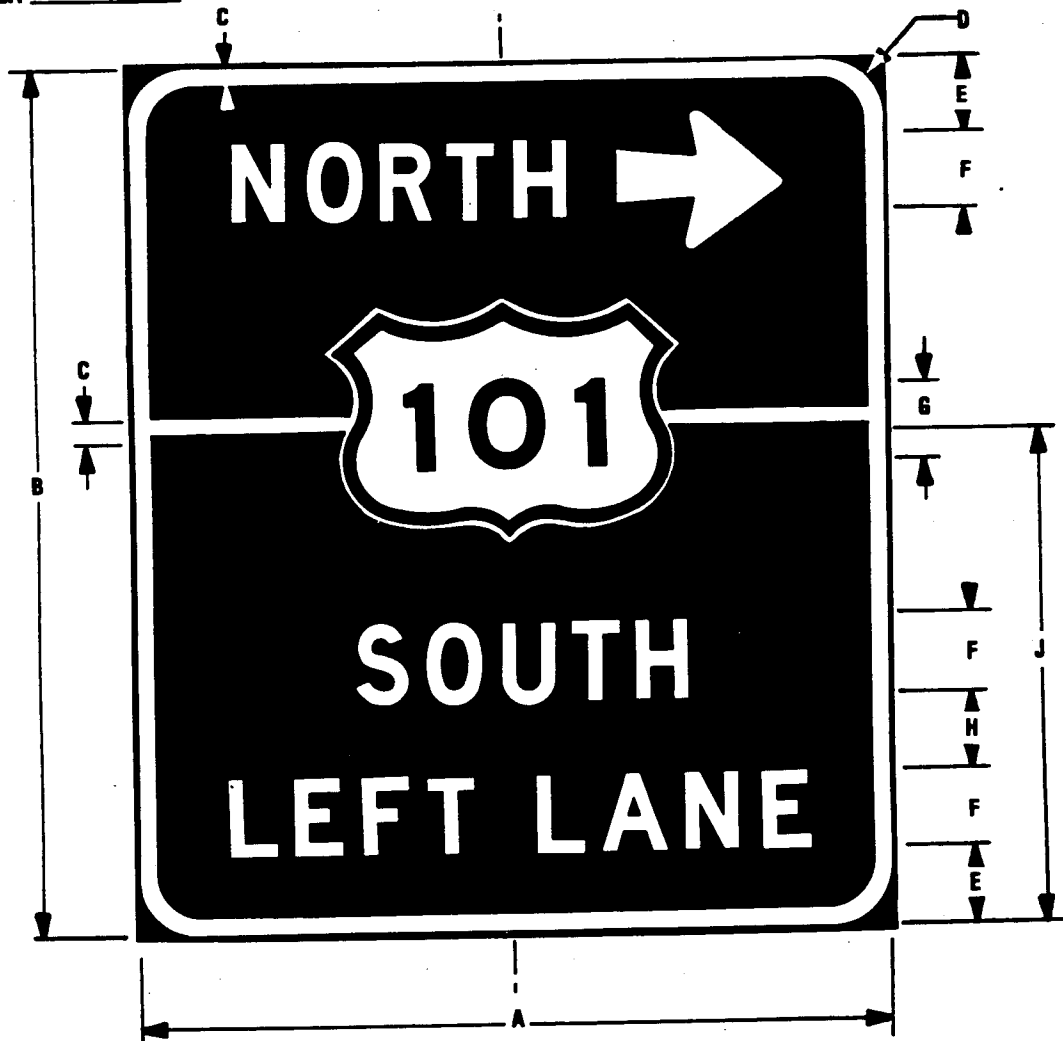


MUTCD NUMBER NONECODE G77A

- NOTE: 1. ARROW MAY BE EITHER HORIZONTAL OR DIAGONAL.  
 2. ON OVERHEAD MOUNTED SIGNS, WITH LIGHTING AND CATWALKS, BOTTOM BORDER SHALL BE OMITTED.  
 3. FOR ARROW DETAILS SEE APPENDIX PAGE 10.  
 4. FOR MOUNTING REFER TO STANDARD POST SPACING TABLE.  
 5. CENTER SHIELD ON BAR.

SIGN	DIMENSIONS (INCHES)								
	A	B	C	D	E	F	G	H	J
MINIMUM	VAR	66	1 1/4	6	6	6CAP	8NUM	6	38 3/8
STANDARD	VAR	90	1 1/2	6	8	8CAP	10NUM	8	52 1/4
SPECIAL	VAR	102	1 1/2	12	9	10CAP	10NUM	10	60 1/4

## COLORS

BORDER &amp; LEGEND - WHITE (REFL)

BACKGROUND - GREEN

THE POLICY FOR INTENDED USAGE OF THIS SIGN IS SHOWN ON REVERSE SIDE.

CHIEF, DIVISION OF TRAFFIC ENGINEERING

6/17/87

DATE

REVISION

REVISION